


Manual Stacker with Fixed Forks

POWERLIFT

- Compact design for European pallet 550/580mm x 1100/1150mm.
- High quality steel mast and strong steel construction ensures rigidity and durability.
- Welded forks deliver low-cost solution.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains .
- With safety wheel guard and brake system to ensure safety during operation.

Model:
SDJ500
SDJ1000
SDJ1500

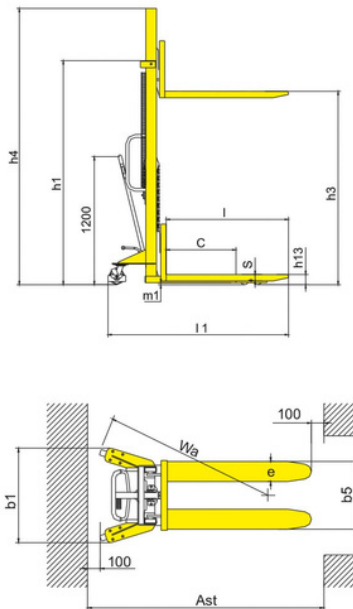

Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

SDJ series with fixed forks

1KG=2.205LB 1INCH=25.40MM

Model		SDJ500	SDJ1000	SDJ1500
Load capacity/rated load	Q(kg)	500	1000	1500
Load centre distance	c(mm)	600	600	400
Fork height, lowered	h ₁₃ (mm)	90	90	90
Height, mast lowered	h ₁ (mm)	1490/2080	1490/1720/2080/1838/2080	2080
Max. lift height	h₄(mm)	1000/1600	1000/1200/1600/2500/3000	1600
Height, mast extended	h ₄ (mm)	1490/2080	1490/1720/2080/2925/3420	2080
Overall length	l ₁ (mm)	1685	1685/1695	1685
Overall width	b ₁ (mm)	755	755/755/755/860/860	755
Fork dimensions	s/e/l(mm)	55/170/1150	55/170/1150	55/170/1150
Width overall forks	b ₅ (mm)	550	550/550/550/580/580	550
Ground clearance, laden, below mast	m ₁ (mm)	20	20	20
Aisle width for pallets 1000x1200 crossways	A _s (mm)	2057	2057/2082	2057
Aisle width for pallets 800x1200 lengthways	A _l (mm)	1991	1991/2016	1991
Turning radius	W _s (mm)	1325	1325/1350	1325
Lift speed,laden/unladen	mm/time	23/25	20/22	16/18
Lowering speed,laden/unladen	mm/s	Manual control	Manual control	Manual control
Service weight	kg	185 / 213	190/198/214/292/305	239